




imageFORMULA DR-F120 SCANNER

PRODUCT SPECIFICATIONS

Model Name	imageFORMULA DR-F120 Document Scanner
Type	Universal Workgroup
Document Feeding	Automatic or Manual
Document Size Width	Feeder: 2" to 8.5" Flatbed: 8.5"
Document Size Length	Feeder: Up to 60 ppm Flatbed: Up to 120 ipm Long Document Mode: Up to 39.4"
Thickness Automatic Feeding	9 - 32 lb. Bond
Feeder Capacity	Up to 50 Sheets
Grayscale	8-Bit
Color	24-Bit
Scanning Element	One-Line Contact Image Sensor (CMOS)
Light Source	RGB LED

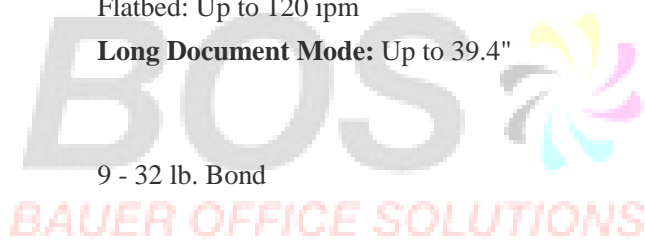

imageFORMULA DR-F120 SCANNER

Operating Modes	Color, Grayscale, Black and White, Error Diffusion, Advanced Text Enhancement, Advanced Text Enhancement II
Drop Out Color	RGB
Optical Resolution	600 dpi
Output Resolution	100/150/200/240/300/400/600/1200/2400 dpi
Scanning Speeds	
Black And White	Simplex: 20 ppm Duplex: 36 ipm
Grayscale	Simplex: 20 ppm Duplex: 36 ipm
Color 24 Bit	Simplex: 10 ppm Duplex: 18 ipm
Interface	Hi-Speed USB 2.0
Dimensions	4.7" x 18.5" x 13.2"
Weight	10.1 lb. (without AC adapter)
Power Consumption	19.9 W or less (Sleep Mode: 2.5 W or less)

imageFORMULA DR-F120 SCANNER

Other Features

Adjustable Gamma Settings, Automatic Color Detection, Automatic Page Size Detection, Automatic Resolution, Background Smoothing, Black-and-White Contrast, Batch Separation, Character Emphasis, Color Dropout, 3-D Color Correction, Deskew, Full Auto Mode, Log File Creation, Moiré Reduction, Prescan, Prevent Bleed Through/Remove Background, Shadow Cropping (Feeder only), Skip Blank Page, Text Enhancement, Text Orientation Recognition

Supported OS: Windows® Vista SP 2 or later (32-bit/64-bit), Windows 7 SP 1 or later (32-bit/64-bit), Windows 8/8.1 (32-bit/64-bit), Windows Server 2008/2012 R2

Bundled Windows Software: ISIS®/TWAIN Drivers; Canon CaptureOnTouch; EMC Captiva Cloud Capture RunTime

Options

Exchange Roller Kit; eCarePAK Extended Service

